

# 9320A Quick Setup Guide




GENELEC®

## In the package


- 9320A SAM Reference Controller.
- 2-metre USB-C to USB-C cable and USB-A to USB-C adapter.
- Genelec 8300A factory-calibrated reference microphone and holder.

## 1. Connections


### 1a. Mac/PC and Headphones

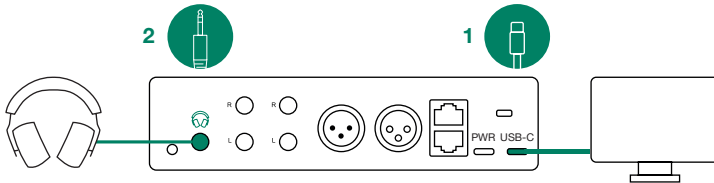

### 1b. Monitors and GLM Control Network

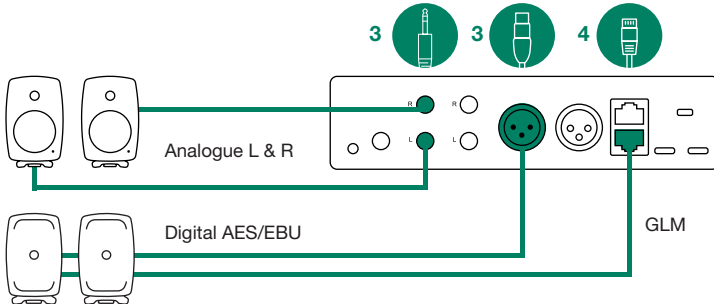


### 1c. GLM microphone




## 2. Install GLM software

2a. <http://my.genelec.com>

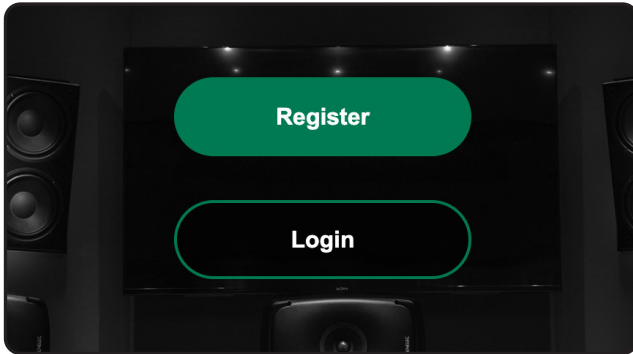

2b. <https://my.genelec.com/software>

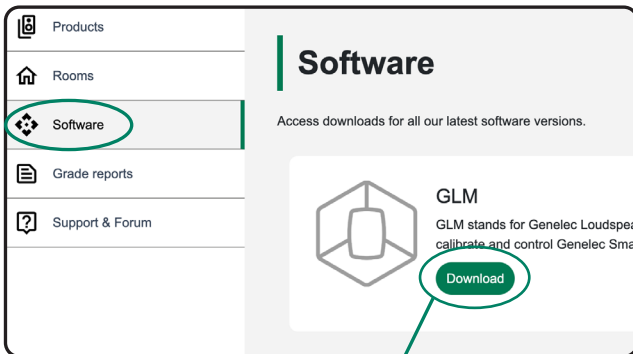


**Download**  
(Includes GLM operating manual)

2c. Launch GLM 5




### 3. In GLM software


#### 3a. Place monitors in Layout

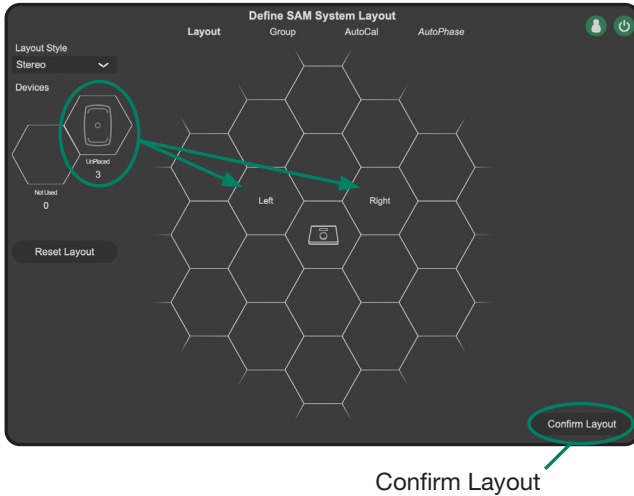


#### 3b. Select signal type: analogue or AES

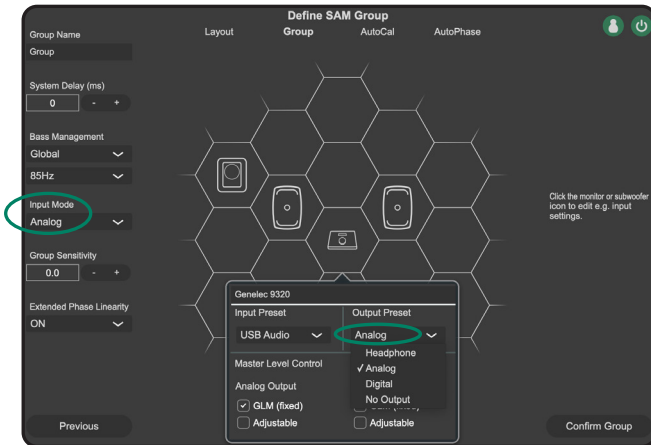

### 3c. Place Measurement Microphone

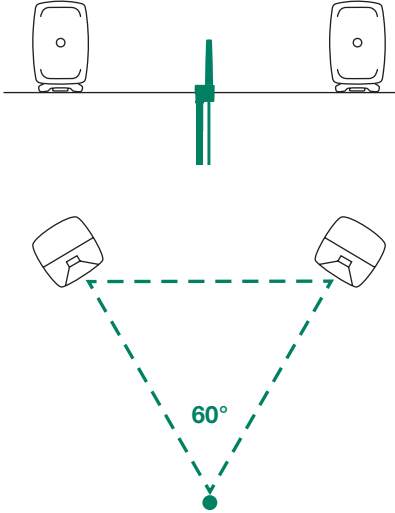


### 3d. Automatic System Calibration

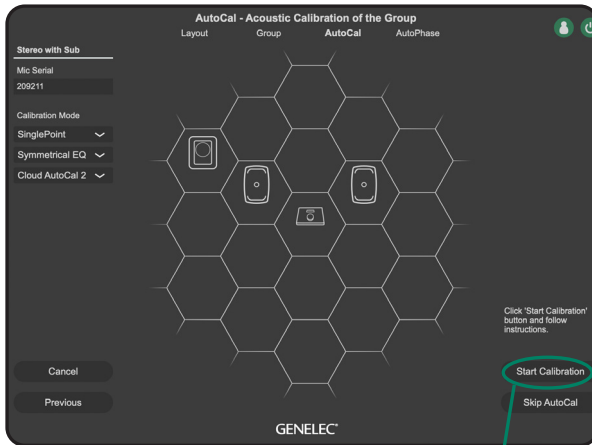


Start Calibration

### 3e. (Optional Subwoofer Calibration)

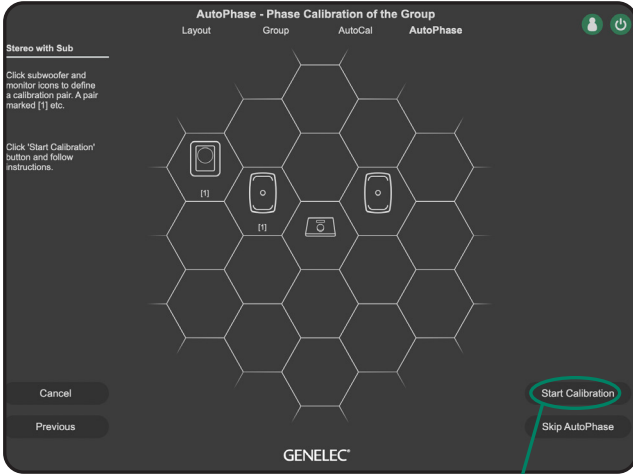


Start Calibration

### 3f. 9320A Reference Controller Settings

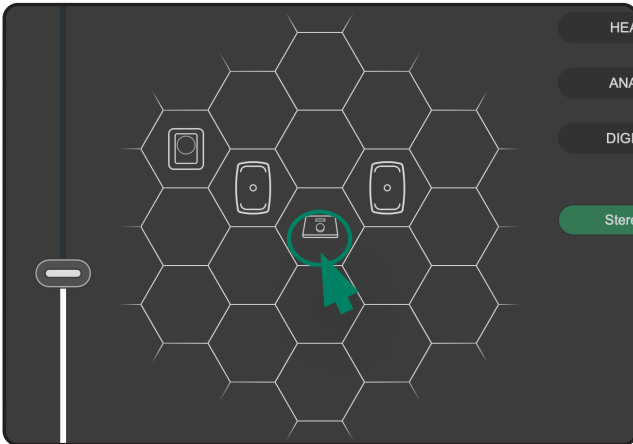


### 3g. Open Settings

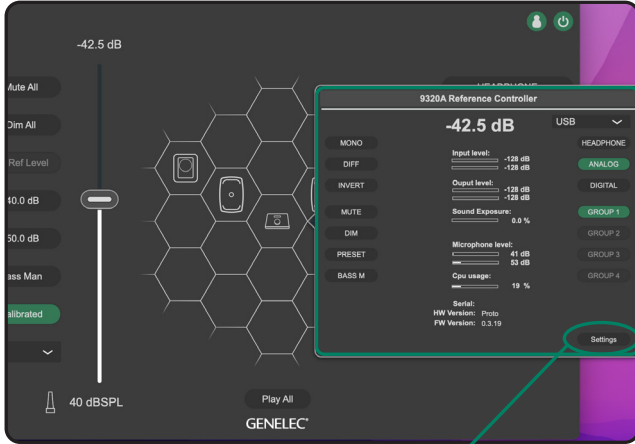


Settings

### 3h.

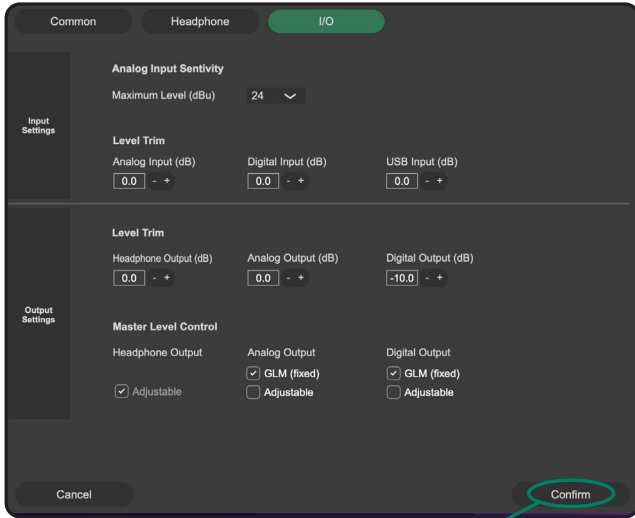


Confirm


# 4. Application examples



## 4a. USB Audio Output to Headphones

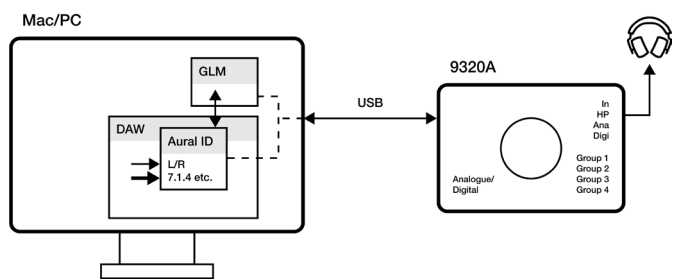


## 4b. Using with Audio Interface

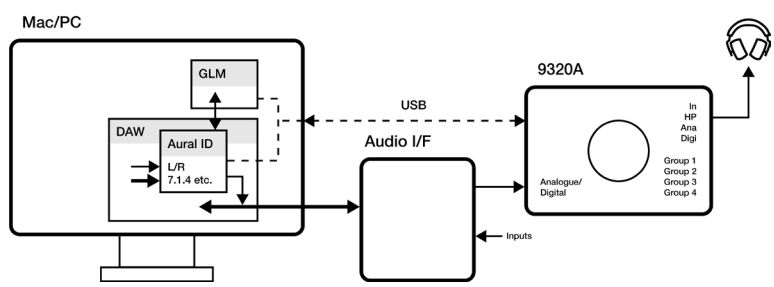




#### 4c. Monitors on 9320A Reference Controller

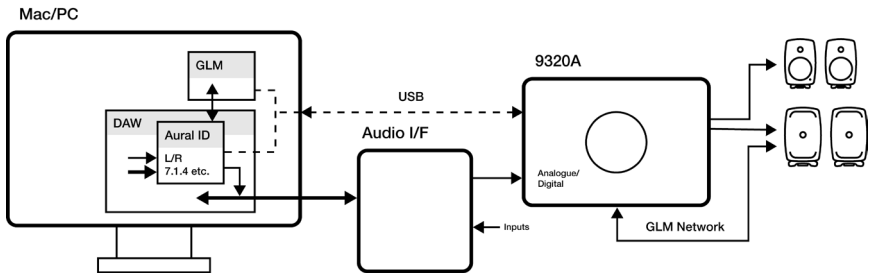

#### 4d. Immersive Monitors, 9320A as Controller

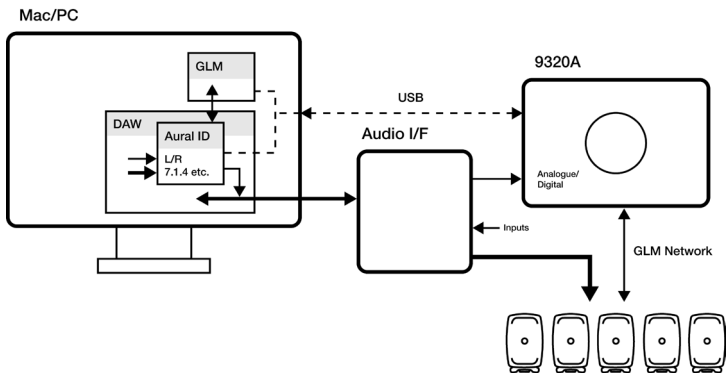

## 5. Download 9320A manual

<http://genelec.com/9320a>



**Chapter 8:  
Configuration**

