

SC6-L Mobile Interview Kit


DUAL SMARTLAV+ MICROPHONES AND SC6-L MOBILE INTERFACE FOR APPLE DEVICES



DESIGNED FOR
APPLE DEVICES



HEADPHONE
OUTPUT JACK



DUAL TRRS
CONNECTION

The SC6-L Mobile Interview Kit records broadcast-quality 2-person interviews on your Apple® device anywhere, anytime. The SC6-L TRRS-to-Lightning adapter connects with 2 SmartLav+ microphones for easy recording and includes a headphone output for live monitoring.

2 x 3.5mm TRRS Microphone Inputs
for Lightning connection

3.5mm Headphone Output

Pairs with RØDE Reporter App

App allows configuration of:

Record Mode (Stereo/Separate)

Direct Monitoring on/off

Mic Pre gain






SPECIFICATIONS

Acoustic Principle:	Permanently Polarised Condenser
Active Electronics:	JFET
Polar Pattern:	Omn-directional
Frequency Response:	SC6L: 20Hz - 20 kHz SmartLav+: 60 Hz - 18 kHz
Signal to noise Ratio:	69 dB
Equivalent Noise:	25 dB Typical
Maximum SPL:	n/a
Power Requirement:	Powered from iPhone TRRS socket (2.7V)
Output Connection:	SC6-L: 3.5mm Headphone Output SmartLav+: Gold-plated TRRS plug
Analog Outputs:	3.5mm TRS Headphone Output
Computer Connectivity:	Lightning (iPhone/iPad/iPod)
Simultaneous I/O:	2/2
Bit Depth:	24-bit
Sample Rates:	44.1/48 kHz
Direct Monitor:	Yes
Bus Powered:	Yes
OS Requirements:	iOS 11 and higher
Material:	PC and ABS Plastic
Colour:	Black
Weight:	53g
Packed Weight:	113g


Front view

Side view


Back view

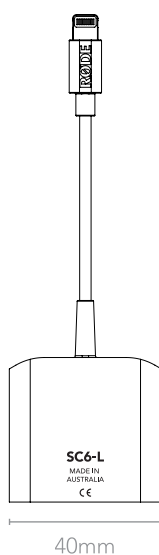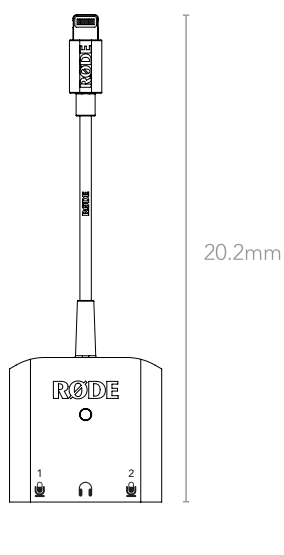

POLAR PATTERN



FREQUENCY RESPONSE

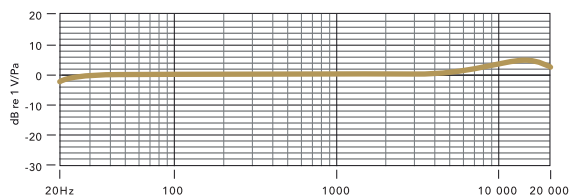

IN THE BOX

(1) SC6-L, (2) SmartLav+

